


AudioVox AVXDATA and EVO-ALL


1. Plug in the Flash-Link Updater into the computer's USB port with the provided USB cable.




2. Run Flash Link Manager Software.

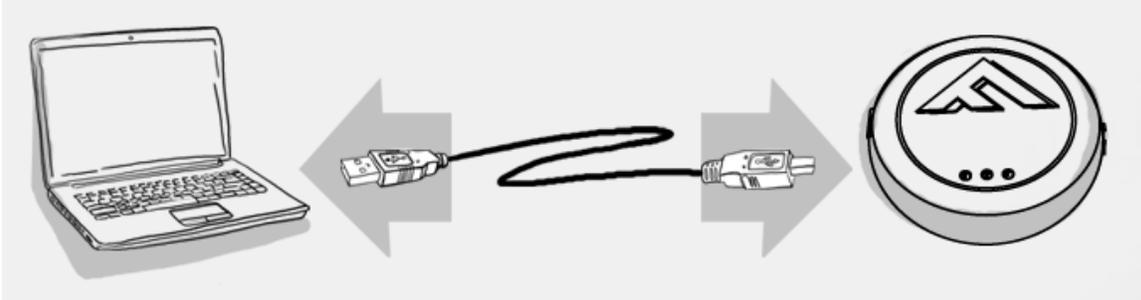


3. Plug in the Module you want to Flash update with the provided DATALINK cable.

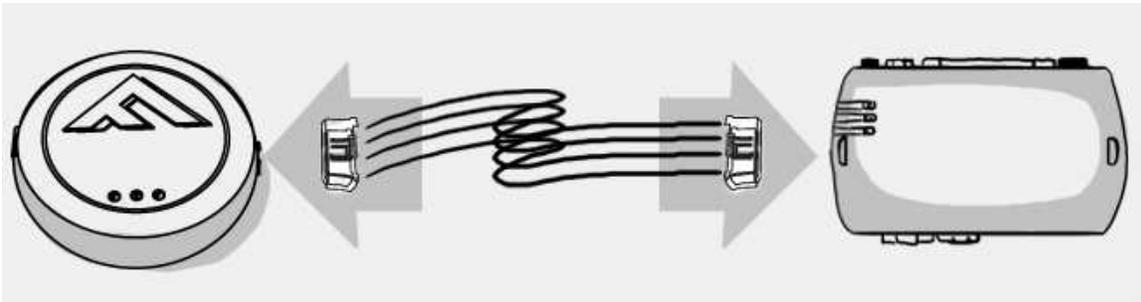

4. Click on UNIT OPTIONS tab.

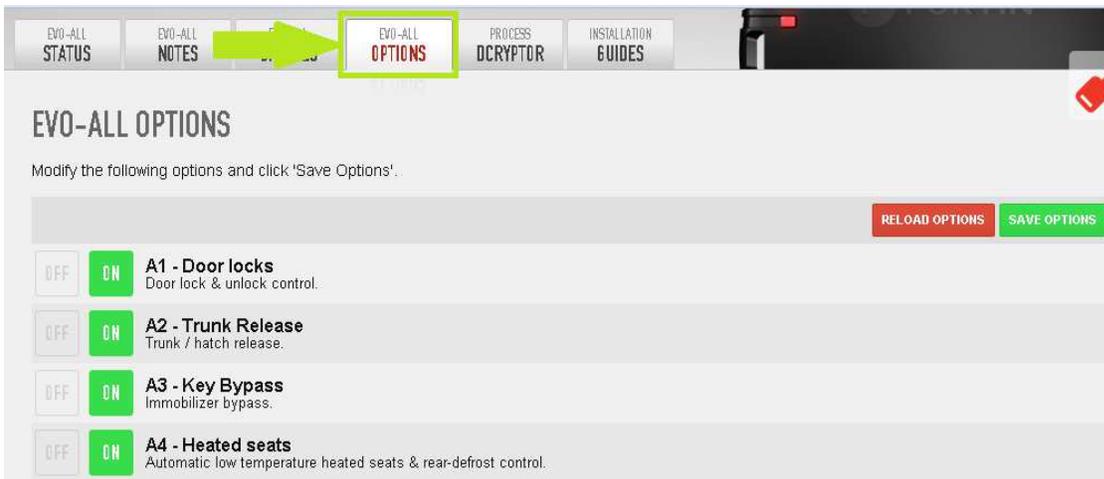

5. Activate Supported RF Kits and option H4 – AudioVox FLRF.

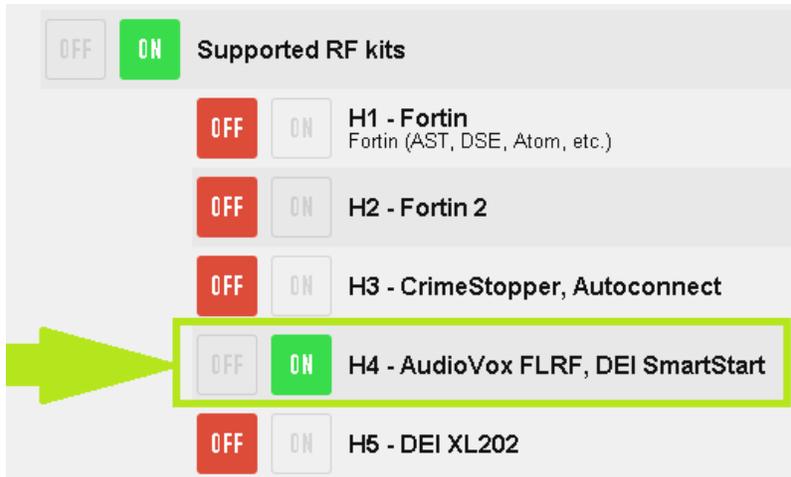

6. Click SAVE OPTIONS.




7. Wait for the Options Saved message to appear in the top right corner.




8. Connect the Audiovox AVXDATA and the EVO-ALL together with the cable adapter |# PART NO. : "RF-A2A".

StandAlone without T-Harness:

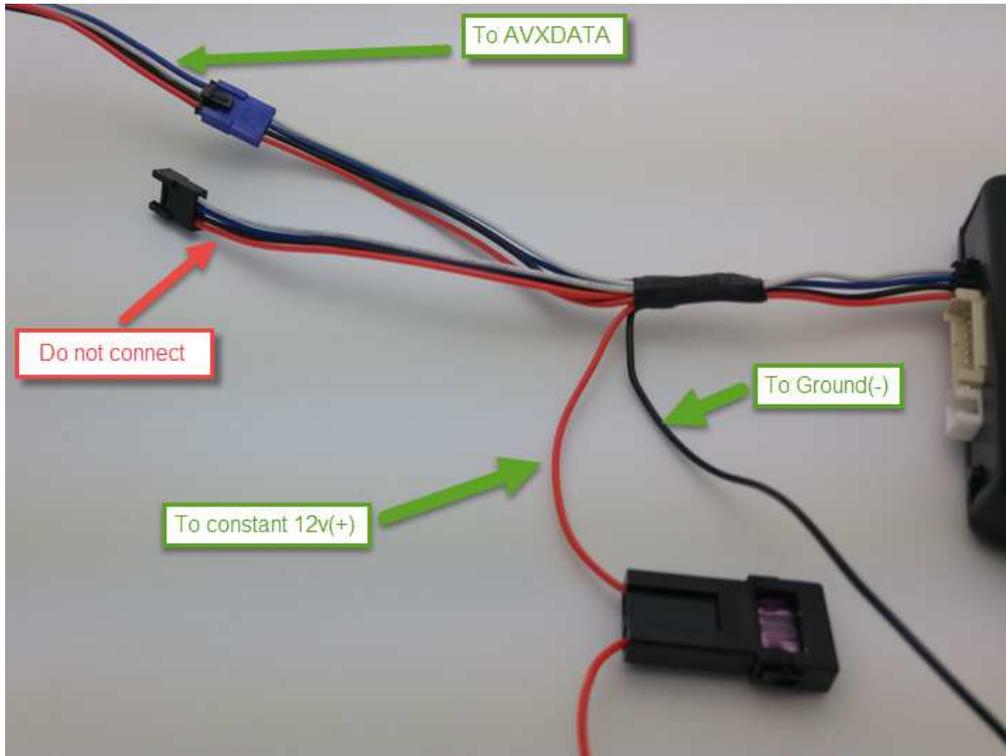


StandAlone with T-Harness:

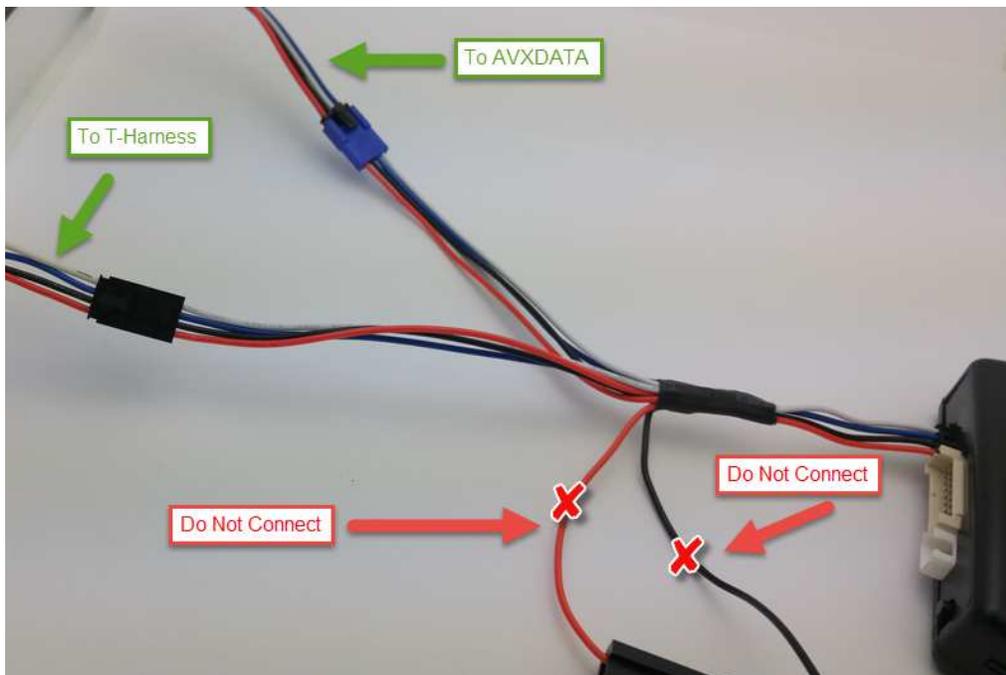

Or use the “Do-It-Yourself” way :

Modify the Antenna cable supplied with the Audiovox AVXDATA with a knife as shown and supply power (12v(+)) and ground(-) to the Audiovox AVXDATA cable.

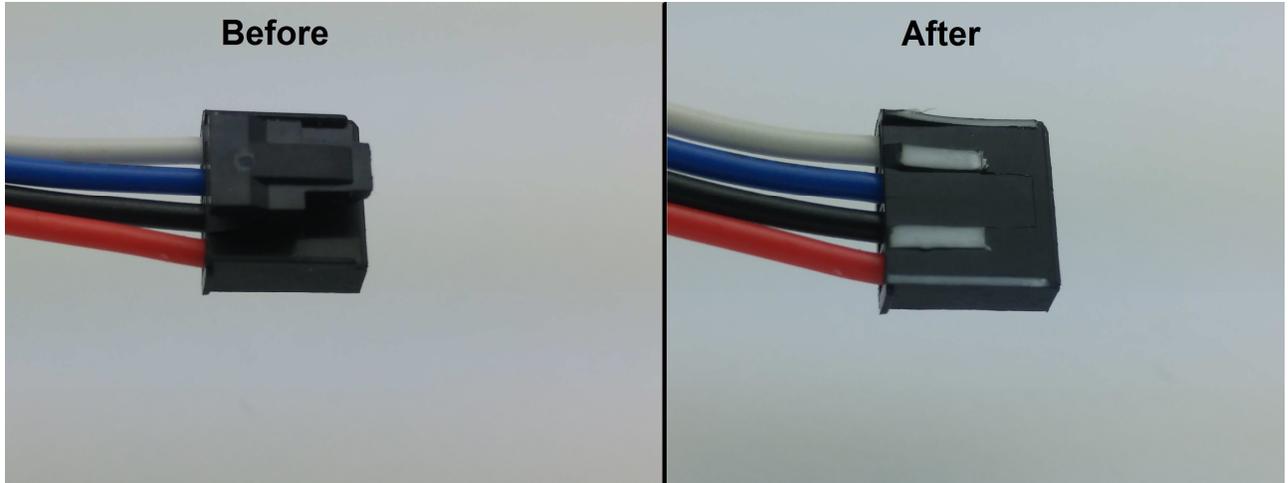

8. To program remote on the module, turn Ignition On, press 3 times on the Antenna button, press LOCK button on every remote and turn ignition Off.
9. Test your installation.

AudioVox AVXDATA Tested with :

Pursuit PR5B