


FirsTech (COMPUSTAR) with EVO-ONE (03/2017)

For ANT-AM, if not programming, update EVO-ONE remote starter side to 0,96.

1. Plug in the Flash-Link-2 updater into the computer's USB port with the provided USB cable.

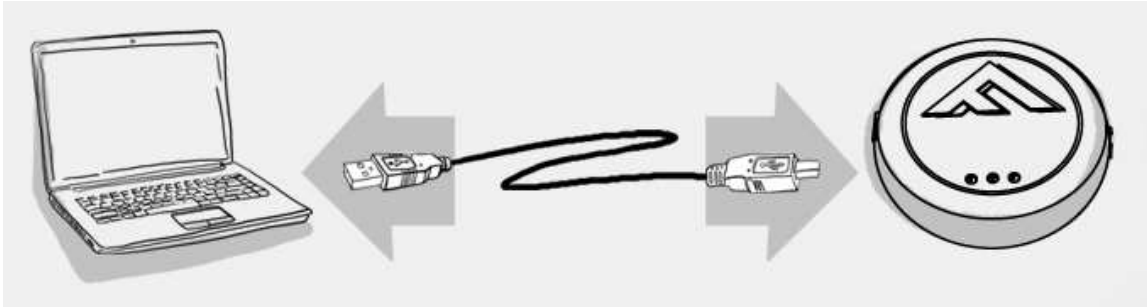


2. Run Flash Link Manager Software.




3. Click TOGGLE to switch to remote starter connection mode.




4. Plug in the EVO-ONE with provided DATALINK cable.

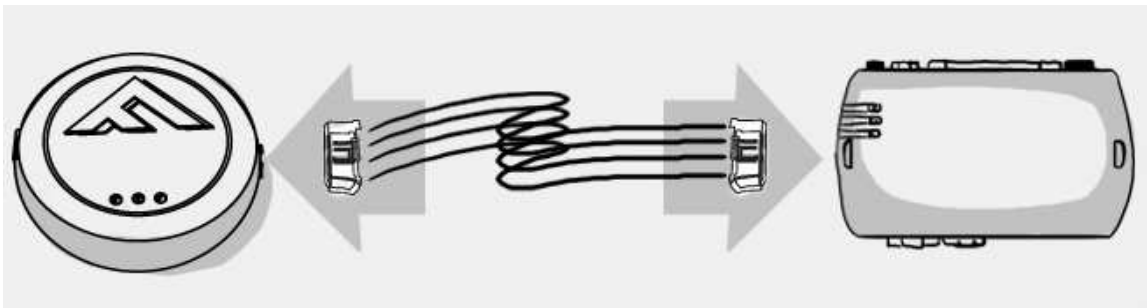


5. Click configuration and then Unit Options.

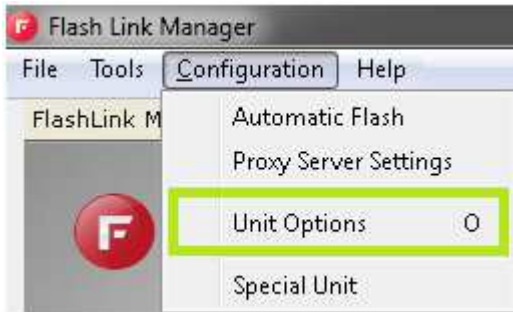

6. Select FirsTech (COMPUSTAR) , click SAVE and disconnect the EVO-ONE

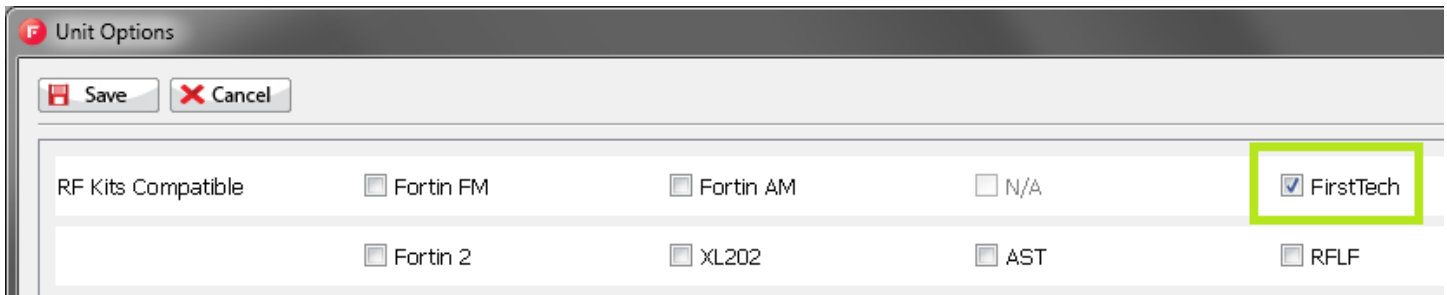


7. Connect the FirsTech (COMPUSTAR) Antenna (6 Pin Or 4 Pin) and the EVO-ONE together with the **RFA-COMPU*** RF converter and cable.

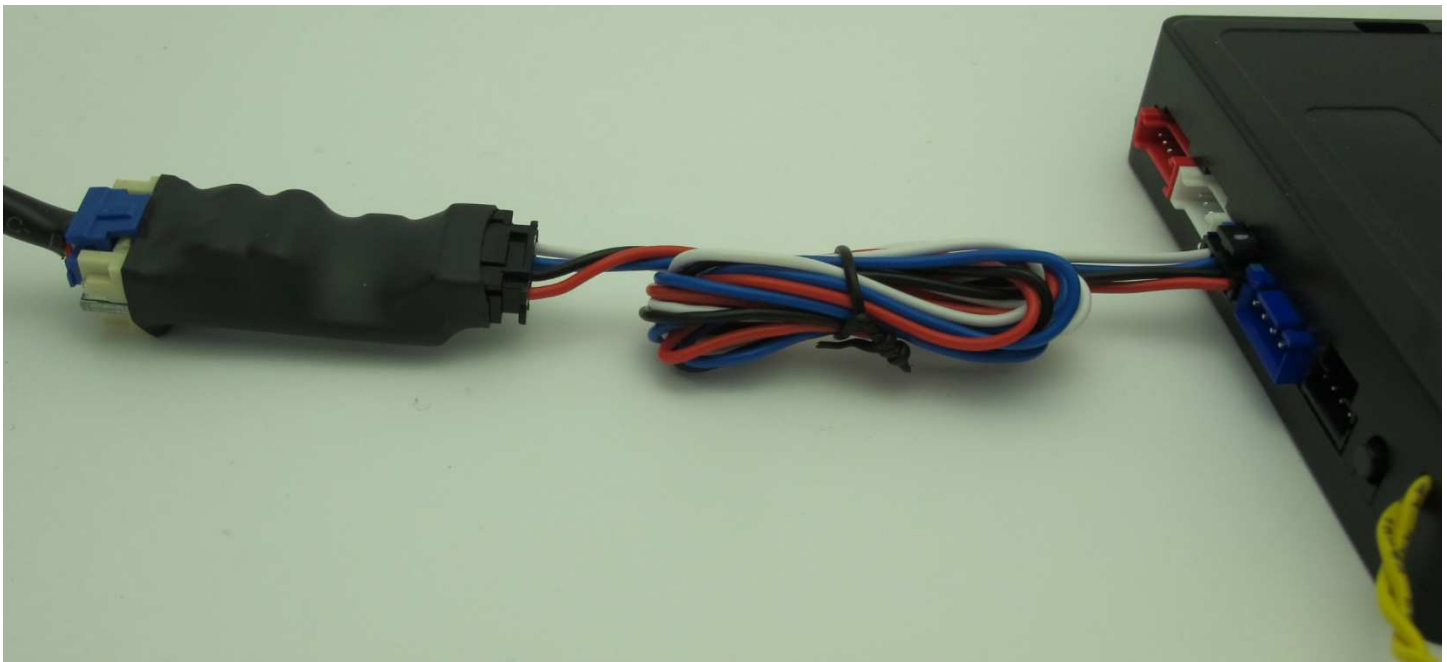

***RFA-COMPU** is an adapter made by FORTIN that converts the EVO-ONE's 4 pin Blue connector into a 6 pin and a 4 pin to fit FirsTech (COMPUSTAR) RF connector's pinout.

Or use the Do-It-Yourself method as shown:

For 4 Pin antennas* ONLY:

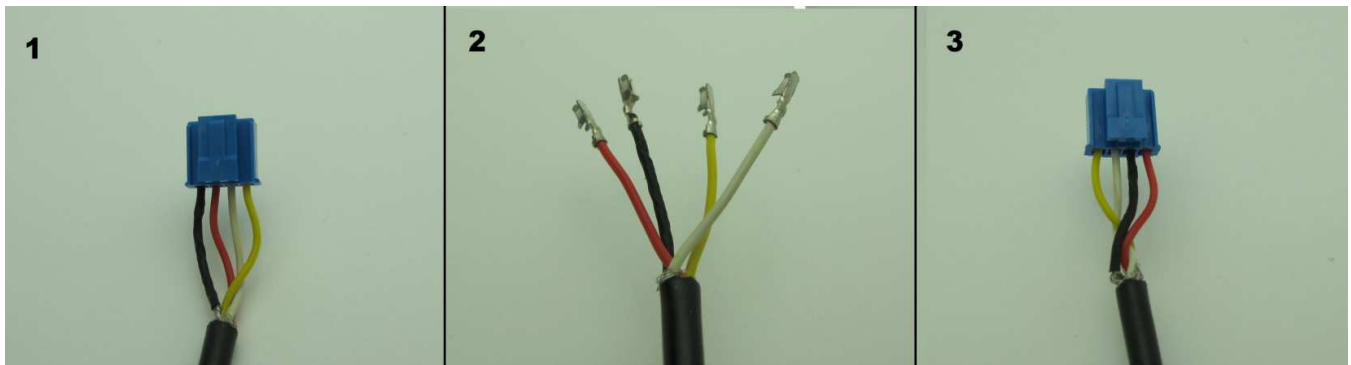








*The FirstTech (COMPUSTAR) 6 Pin connector contain a 12v and a 5v so the FORTIN'S **RFA-COMPU** is mandatory.

8. Turn IGNITION ON. Press and hold Valet switch until the side red light flash on EVO-ONE then release. Press and release the Valet switch one time. Press and release the Brake pedal once. Send lock with FirstTech (COMPUSTAR) Remotes, wait 10 seconds and Turn IGNITION OFF.

STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	STEP 6	STEP 7
Turn the Ignition on.	Press and hold the valet-switch until the LED flashes, then release.	Press and release the valet-switch once. The park-lights will flash to confirm.	Press and release the brake pedal once.	press the LOCK button once the park-lights will flash to confirm	Press and release the brake-pedal once.	Turn the Ignition off.

*** Some FirsTech (COMPUSTAR) kit will not program on mode 1. If it is your case try mode 5:

***For ANT-AM, if not programming, update EVO-ONE remote starter side to 0,96

<p>STEP 1</p>  <p>Turn the Ignition on.</p>	<p>STEP 2</p>  <p>Press and hold the valet-switch until the LED flashes, then release.</p>	<p>STEP 3</p>  <p>Press and release the valet-switch 5X. The park-lights will flash to confirm.</p>	<p>STEP 4</p>  <p>Press and release the brake pedal once.</p>	<p>STEP 5</p>  <p>press the LOCK button once the park-lights will flashto confirm</p>	<p>STEP 6</p>  <p>Press and release the brake-pedal once.</p>	<p>STEP 7</p>  <p>Turn the Ignition off.</p>
--	---	--	--	---	--	---

If you want to change EVO-ONE options, use the following button mapping:

mode 1 : Lock

mode 2 : Unlock

mode 3 : Trunk

mode 4 : Start

mode 5 : Aux1

mode 6 : Aux2

Tested with :

RF-1WG6-AM (0.96)

RF-1WG9-SP

RF-2W1B-SP

RF-2WG9-SP

RF-2W704-SH

RF-2W9000-SS

RF-2W901-SS (1.21)