


## DEI SmartStart with EVO-ALL

Will work with: DSMC200, DSMC250, VSMC200, VSMC250

1. Plug in the Flash-Link-2 updater into the computer's USB port with the provided USB cable.

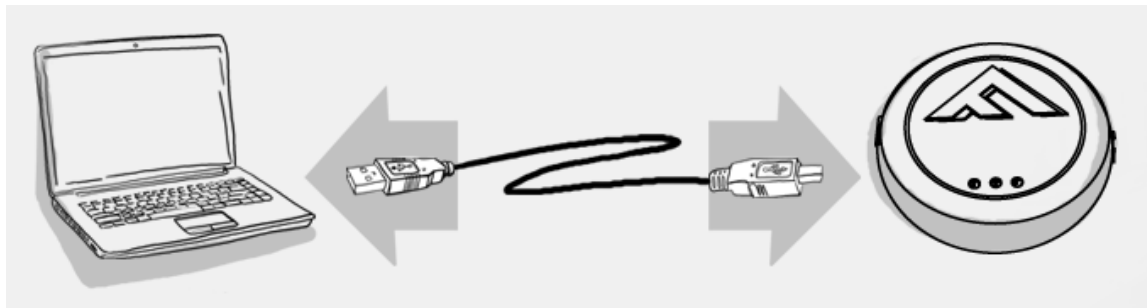


2. Run Flash Link Manager Software.




3. Plug in the EVO-ALL with provided DATALINK cable.




4. Click on UNIT OPTIONS tab.

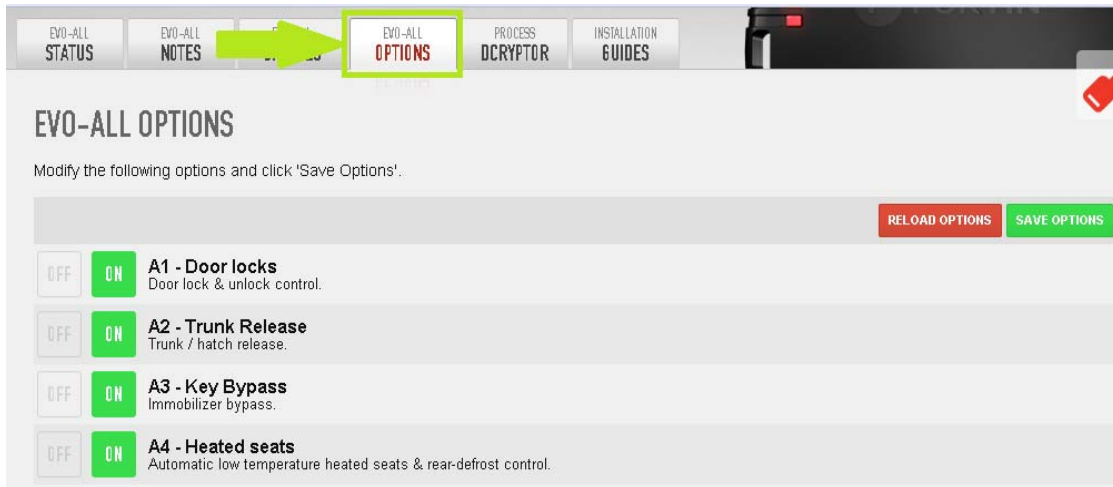


5. Activate Supported RF Kits and option H4 – DEI SmartStart.

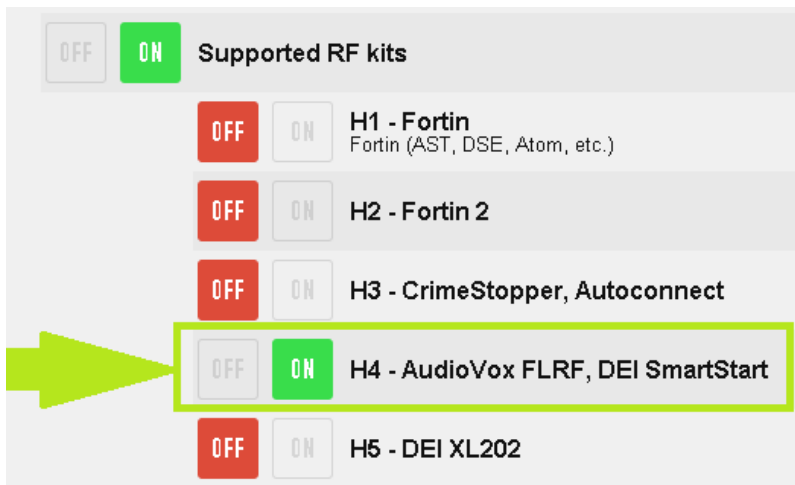


6. Click SAVE OPTIONS.

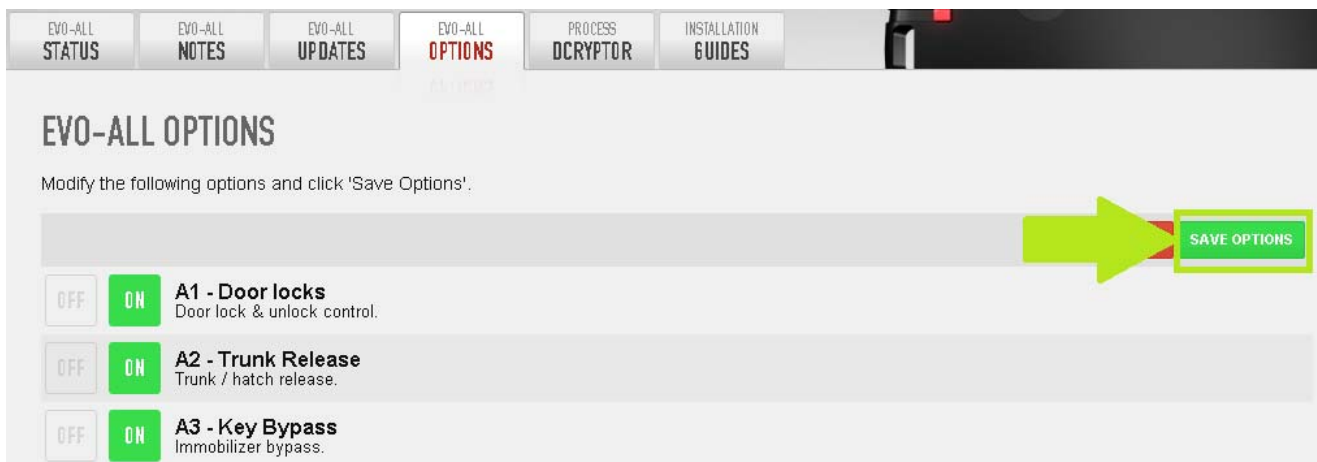


7. Wait for the Options Saved message to appear in the top right corner.

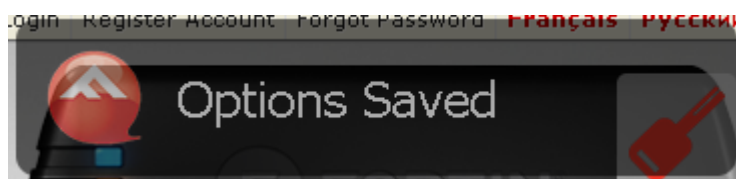

8. Ground the DEI SmartStart Grey wire as shown.

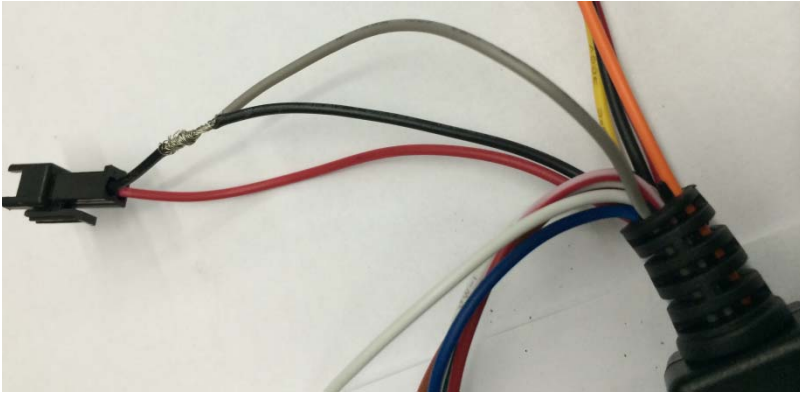

9. Connect the DEI SmartStart and the EVO-ALL together with the supplied cable as shown.

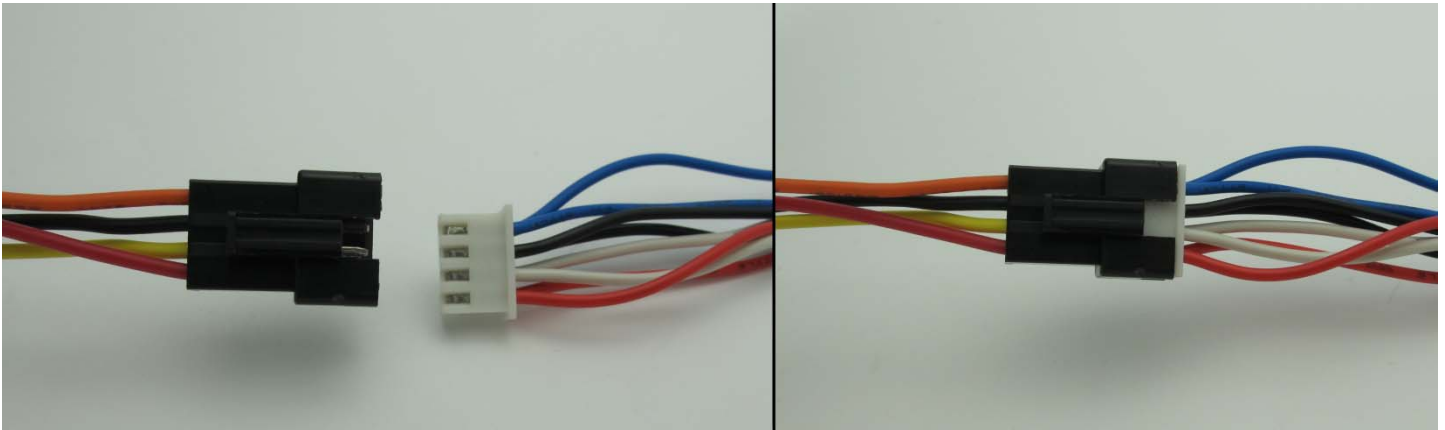

10. Test your installation using DEI SmartStart Manager.