


STAND ALONE INSTALLATION

ADDENDUM - SUGGESTED WIRING CONFIGURATION

VEHICLE	YEARS	Vehicle functions supported in this diagram (functional if equipped)								
		Immobilizer bypass	Lock	Unlock	Trunk release	Tachometer	Door Status	Trunk Status	Hand-Brake Status	Foot-Brake Status
RENAULT										
Fluence	Key Card 2009-2015	•	•	•	•	•	•	•	•	•
Megane III	Key Card 2009-2015	•	•	•	•	•	•	•	•	•
Scenic III	Key Card 2009-2015	•	•	•	•	•	•	•	•	•

At UCH, under Dashboard, driver side

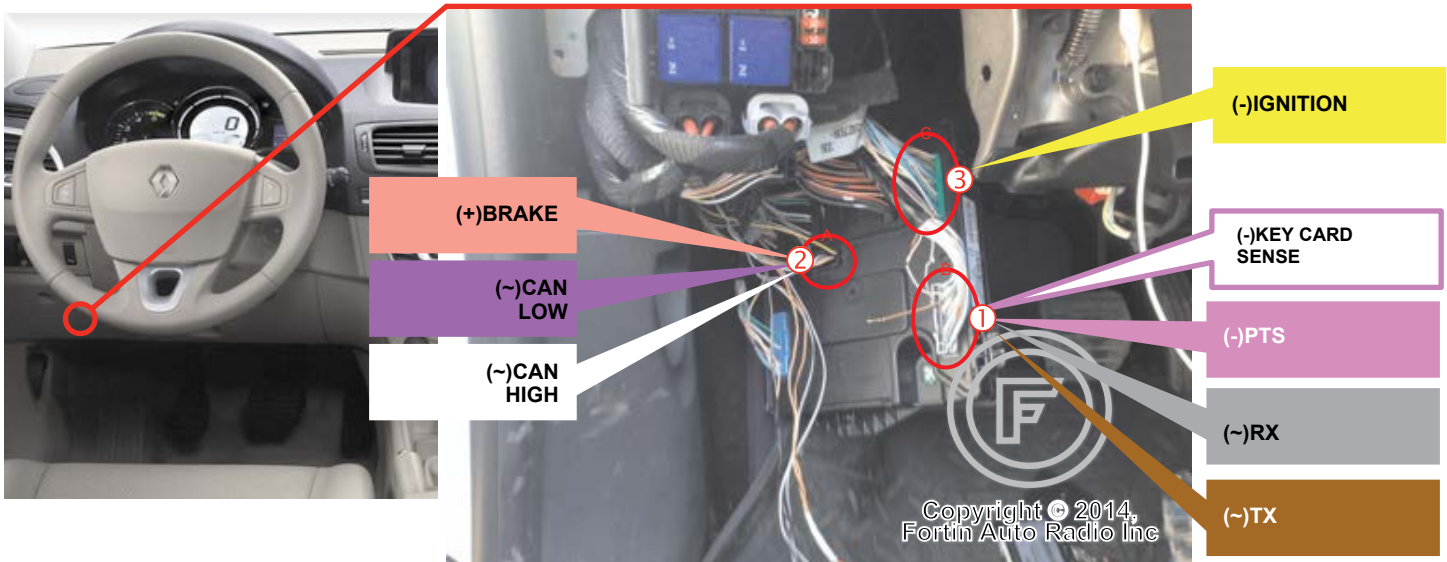

HARDWARE VERSION

MINIMUM **6**

FIRMWARE VERSION

72.[22]

NISSAN/INFINITI MINIMUM

This manual may change without notice. www.fortinbypass.com for latest version.

NOTES

The unlock function will not be functional if the doors are locked with the key card.



Parts required (Not included)

1x 10 Amp fuse








FLASH LINK UPDATER 2




Microsoft Windows Computer & Internet connection



PARTS REQUIRED (NOT INCLUDED)

 <p>FLASH LINK UPDATER 2</p>	<p>FLASH LINK MANAGER SOFTWARE</p> 	<p>1x  Hood Pin</p> <p>1x  Valet Switch</p> <p><i>Optional</i></p>
<p> Microsoft Windows Computer (No Internet connection required)</p>		

STAND ALONE CONFIGURATION

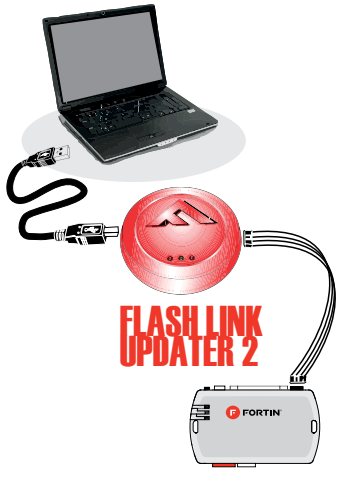

FLASH LINK UPDATER 2

Connect the EVO-ALL module to the Flash Link Updater 2. (Sold separately)




Modify the following options and click 'Save options'

FLASH LINK MANAGER
SOFTWARE

EVO-ALL OPTIONS





D1 - OEM Remote Stand Alone Remote Starter

IF SI **LOCK LOCK LOCK** WITH OEM REMOTE **C1 - OEM Remote Monitoring**





IF SI  WITH RF KIT ANTENNA **Supported RF Kits (and select RF Kit)**

SAVE OPTIONS


REMOTE STARTER FUNCTIONNALITY

 <p>All doors must be closed.</p>	<p>3X  LOCK</p>  <p>Press the OEM remote's Lock button 3x to remote-start (or remote-stop) the vehicle.</p>	<p>START</p>  <p>The vehicle will START.</p>
--	---	---


AUTOMATIC TRANSMISSION WIRING CONNECTION

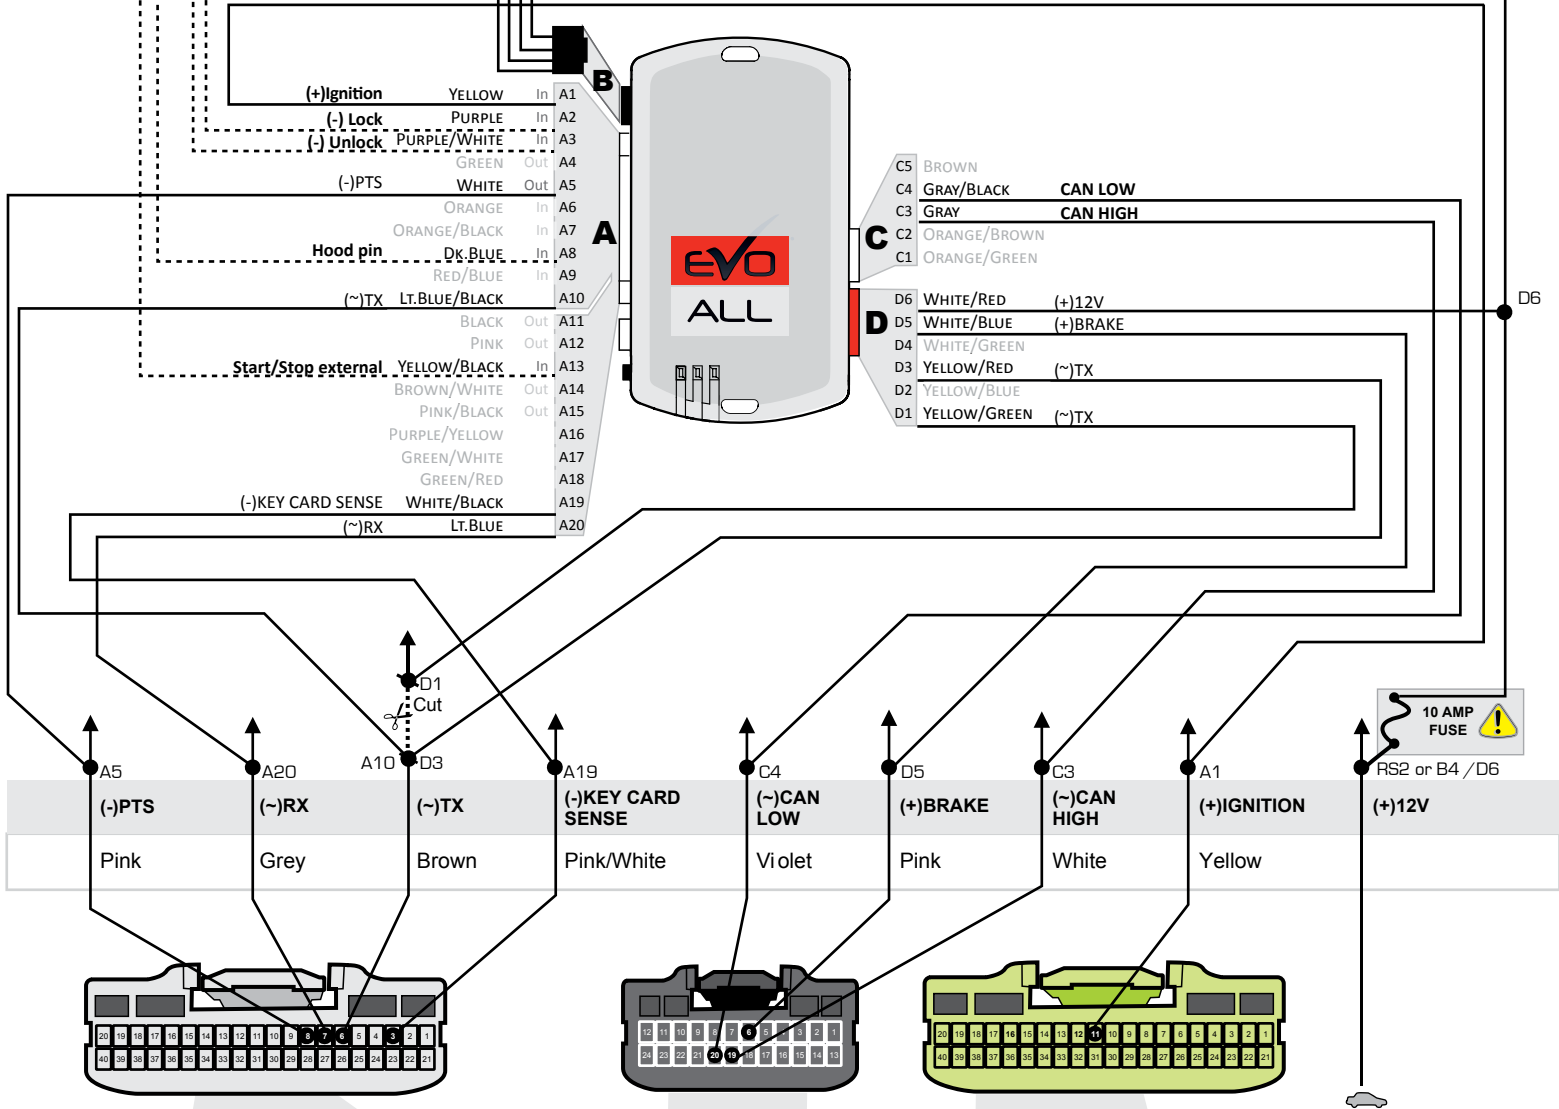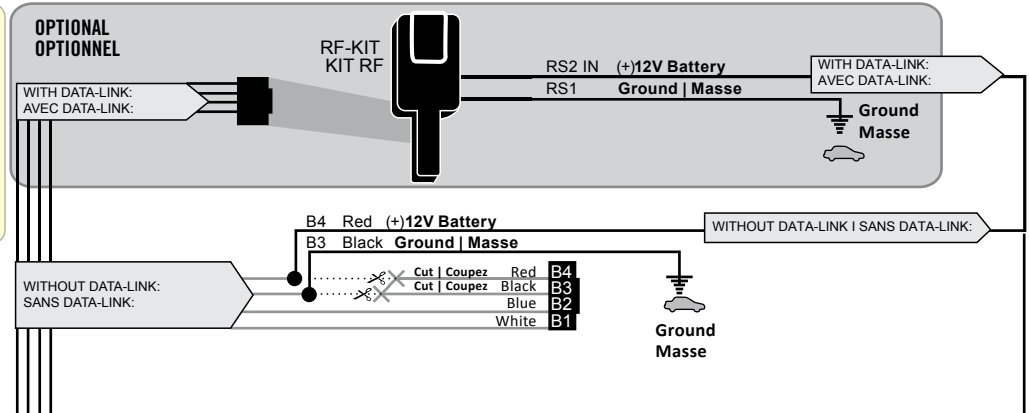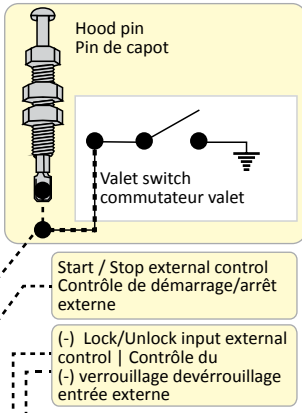


① Back View 40-pins Grey connector



② Back View 24-pins Black connector

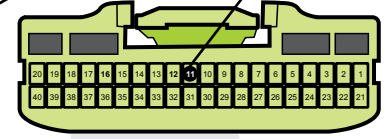


③ Back View 40-pins Green connector



At UCH, under Dashboard, driver side


KEY BYPASS PROGRAMMING PROCEDURE 1/2

1

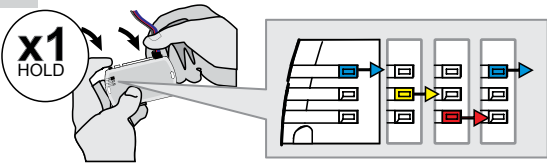


Press and hold the programming button:
Insert the 4-Pin (Data-Link) connector.

2

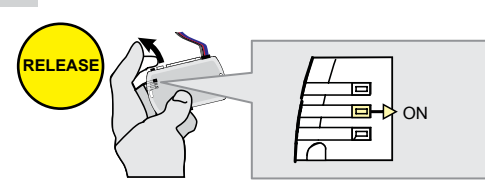


Release the programming button when the LED is **YELLOW**.

If the LED is not solid Yellow disconnect the 4-Pin connector (Data-Link) and go back to step 1.




3



Insert the required remaining connectors.

4

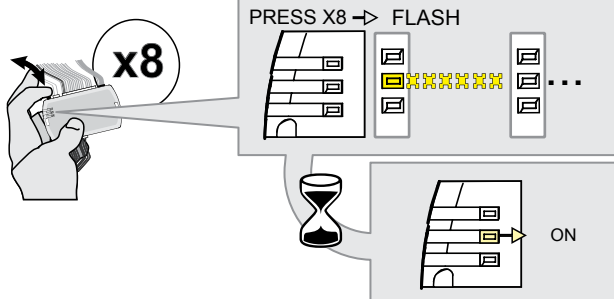


Press and release the programming button 8 times (8x).

↳ The **YELLOW LED** will alternate between 7x flashes and a pause.

↳ Wait until the **YELLOW LED** turns ON.

5

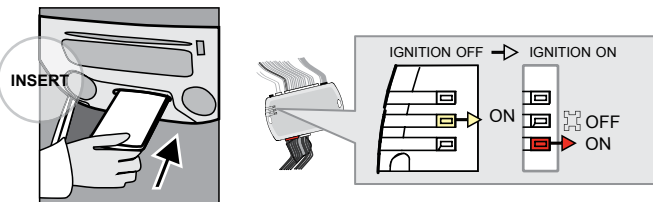

Insert the key card in the key port.


↳ The **RED LED** will turns ON.
↳ The **YELLOW LED** turns OFF.

6



Remove the card key from the key port.

7

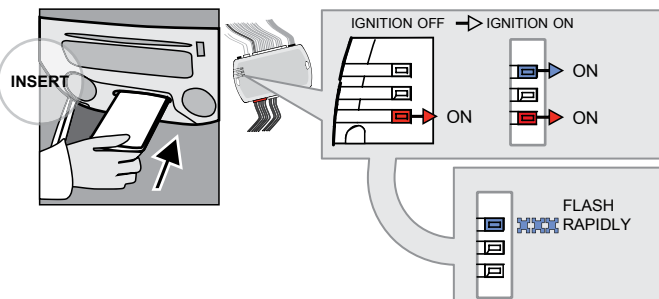


Insert the key card in the key port.

↳ The **RED LED** will turns OFF.

↳ The **BLUE LED** will Flash rapidly.

KEY BYPASS PROGRAMMING PROCEDURE 2/2


8

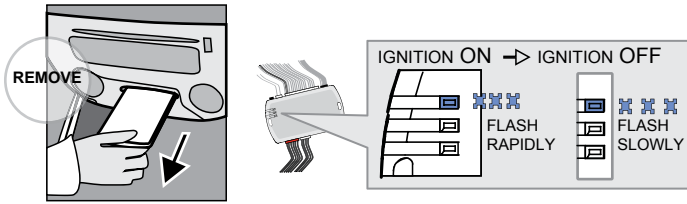

Remove the card key from the key port.


↳ the **BLUE LED** flash slowly.

9

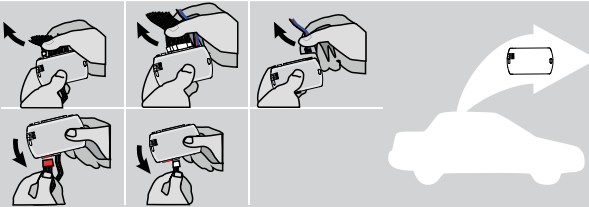

Disconnect the Data-Link (4-pins) connector and after all the remaining connectors.

10

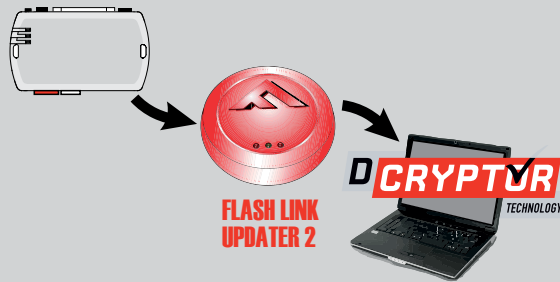

Connect the module to the FLASH LINK UPDATER 2 and visit the DCryptor menu in the Flash-Link Manager.

Parts required (not included)




FLASH LINK UPDATER 2

FLASH LINK MANAGER
SOFTWARE



Microsoft Windows Computer with Internet connection

11

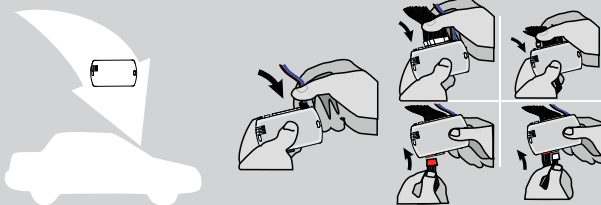

AFTER DCRYPTOR PROGRAMMING COMPLETED
Go back to the vehicle and **reconnect** the 4-Pin (Data-Link) connector and after, all the remaining connector.





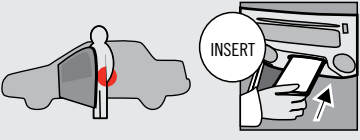


The module is now programmed.




REMOTE STARTER / ALARM VERIFICATION PROCEDURE

Test the remote starter. Remote start the vehicle.

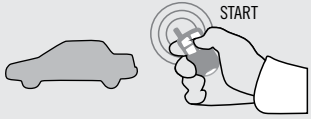REMOTE STARTER FUNCTIONALITY

 <p>All doors must be closed.</p> <p>Remote start the vehicle.</p>	 <p>Unlock the doors with either:</p> <ul style="list-style-type: none"> • The remote-starter remote • Or the door's proximity bouton • Or the proximity remote 	 <p>Enter the vehicle with the Intelligent (Access Key)</p> <p>Insert the key card in the key port.</p>	 <p>The vehicle can now be put in to gear and driven.</p>
 <p>If the vehicle is not unlocked the module will shut down the remote-starter and the vehicle as soon as any door is opened.</p>			

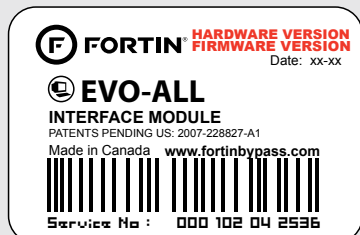

Module label

Notice: Mise à jour microprogramme et Guides d'installations

Des mises à jour du Firmware (microprogramme) et des guides d'installation sont mis en ligne régulièrement. Vérifiez que vous avez bien la dernière version logiciel et le dernier guide d'installation avant l'installation de ce produit.

WARNING

The information on this sheet is provided on an (as is) basis with no representation or warranty of accuracy whatsoever. It is the sole responsibility of the installer to check and verify any circuit before connecting to it. Only a computer safe logic probe or digital multimeter should be used. FORTIN ELECTRONIC SYSTEMS assumes absolutely no liability or responsibility whatsoever pertaining to the accuracy or currency of the information supplied. The installation in every case is the sole responsibility of the installer performing the work and FORTIN ELECTRONIC SYSTEMS assumes no liability or responsibility whatsoever resulting from any type of installation, whether performed properly, improperly or any other way. Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects. This module must be installed by qualified technician. The information supplied is a guide only. This instruction guide may change without notice. Visit www.fortinbypass.com to get the latest version.

Copyright © 2006-2014, FORTIN AUTO RADIO INC ALL RIGHTS RESERVED PATENT PENDING



TECH SUPPORT

Tél: 514-255-HELP (4357)
1-877-336-7797



ADDENDUM GUIDE

www.fortinbypass.com

WEB UPDATE | MISE À JOUR INTERNET

