

PATS KIA 1

Copyright © 2006, FORTIN AUTO RADIO INC. ALL RIGHTS RESERVED



INSTALLATION GUIDE

Made in Canada - V3.0.j - 29 / 10 / 2007
Web site: <http://www.ifar.ca>

TRANSPONDER BYPASS MODULE FOR KIA



WIRING / CONNECTION GUIDE

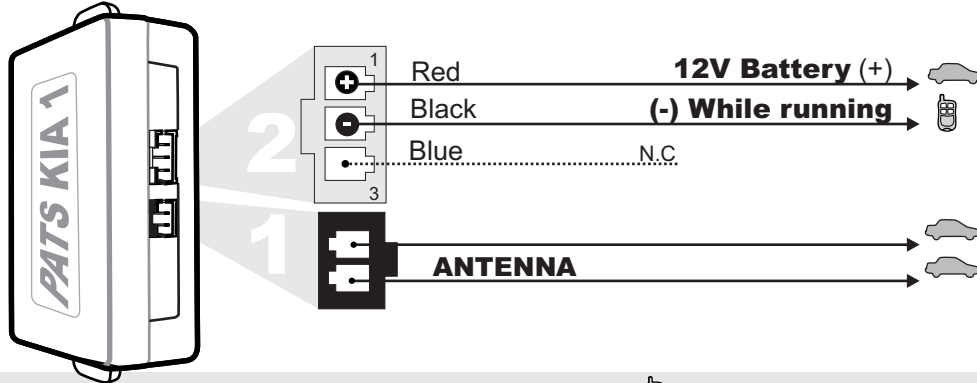

You must have all keys available.



You will need the KIA SCAN TOOL and the vehicle access code.

IMPORTANT : The PATS KIA 1 can only be programmed once. Once the PATS KIA 1 is programmed, it can't be programmed or used on any other vehicle.

START HERE


INSTALLATION AND PROGRAMMING INSTRUCTIONS




Connector 1 (Black):
Make 3 to 4 loops around the ignition barrel.
(Secure the wire with tie-wrap.)




Connector 2 (White):
Connect the red wire to 12V constant.
Connect the black wire to "Ground out when running".



Hook up the SCAN TOOL
Follow instructions on SCAN TOOL display for keys programming procedure (teaching procedure).




Place the PATS KIA 1 transponder (show on Pats label) close and toward the front of the ignition barrel for the next 2 steps.




With the help of a jumper wire, power up vehicle ignition.




Follow instructions on SCAN TOOL.




Remove jumper wire

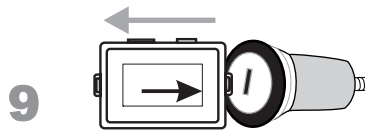

Remove PATS-KIA 1 module.



Make sure all other keys still working.



Connect PATS KIA 1 module.



Start vehicle with remote starter.
The module PATS KIA 1 is now programmed.

VEHICLE FITGUIDE

VEHICLES	YEARS OF VEHICLE COMPATIBILITY				
Kia	2005	2006	2007	2008	
Magentis			•	•	
Optima			•	•	
Rio		•	•	•	
Rondo			•	•	
Sedona		•	•	•	
Spectra	•	•	•	•	
Spectra 5	•	•	•	•	
Sportage 4Cyl.	•	•	•	•	
Suzuki	2005	2006	2007	2008	
SX4				•	

VEHICLES	YEARS OF VEHICLE COMPATIBILITY							
Hyundai	2002	2003	2004	2005	2006	2007	2008	
Accent						•	•	
Azera					•	•	•	
Elantra						•	•	
Entourage					•	•	•	
Santa Fe						•	•	
Tiburon	•	•	•					
Tucson						•	•	
Veracruz						•	•	

TECHNICAL SUPPORT / INFORMATION

Neither the manufacturer or distributor of this module is responsible of damages of any kind indirectly or directly caused by this module, except for the replacement of this module in case of manufacturing defects. This module must be installed by qualified technician. This instruction guide may change without notice. Visit www.ifar.ca to get latest version.

Technical support:
TEL: 514-255-HELP (4357)
FAX: 514-255-1367
Web: www.ifar.ca

FORTIN
ELECTRONIC SYSTEMS

