# PATS KIA 1
## TRANSPONDER BYPASS FOR KIA
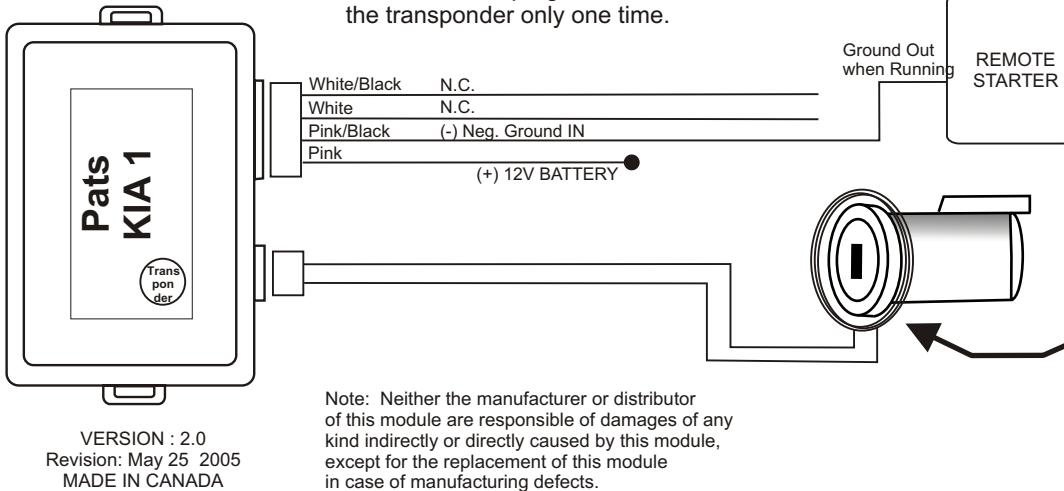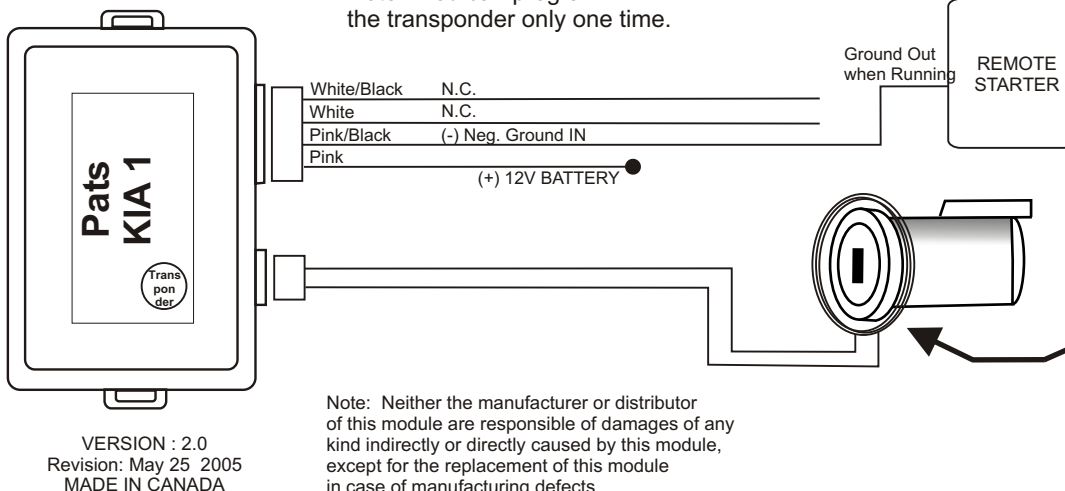
**The KIA SCAN TOOL is required
to programm this module.**

**Programming procedure :**
You must have all keys available. You will need the KIA SCAN TOOL and associated cartridge for keys programming.

1- Hook up the SCAN TOOL and turn the key to ignition position.
2- Follow instructions on SCAN TOOL display for all keys programming procedure including PATS KIA1.
3- Place the Pats KIA 1 transponder (show on Pats label) close and toward the front of the ignition barrel for the next 2 steps.
4- With the help of a jumper wire, power up vehicle ignition.
5- Follow instructions on SCAN TOOL.
6- Remove jumper wire and also Pats KIA 1 module.
7- Make shure all other keys still working.
8- Connect Pats KIA 1 module and start vehicle with remote starter.
The module Pats KIA 1 is now programmed.

| VEHICLE | : |
|---|---|
| SPECTRA | 2005 |
| SPECTRA **5** | 2005 |
| SPORTAGE | 2005 |
| 4 CYL. ONLY | |

**TECHNICAL SUPPORT :**

TEL :  514-255-0446
FAX:   514-255-1367
Web: http://support.fortinautoradio.com

Note : You can program
the transponder only one time.

White/Black     N.C.
White              N.C.
Pink/Black      (-) Neg. Ground IN
Pink
(+) 12V BATTERY

Ground Out
when Running

REMOTE
STARTER

3 turns of loop around
the ignition key are required.

Pats
KIA 1

Trans
pon
der

VERSION : 2.0
Revision: May 25  2005
MADE IN CANADA

Note:  Neither the manufacturer or distributor
of this module are responsible of damages of any
kind indirectly or directly caused by this module,
except for the replacement of this module
in case of manufacturing defects.